



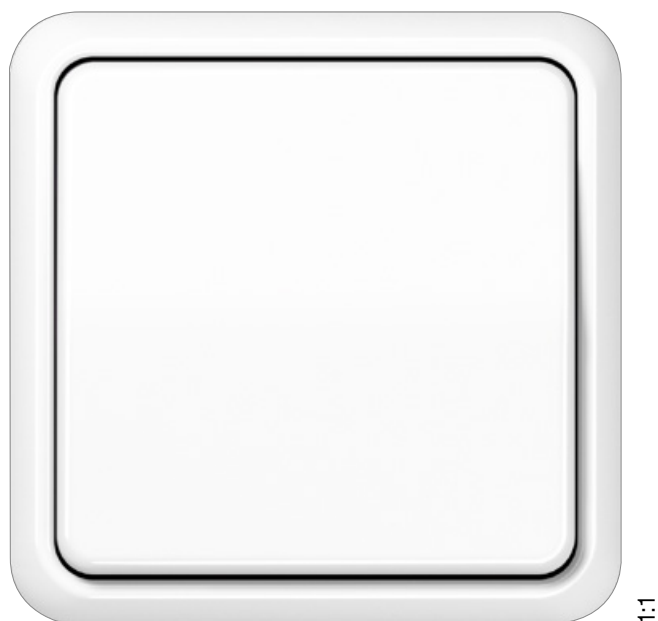

1:1

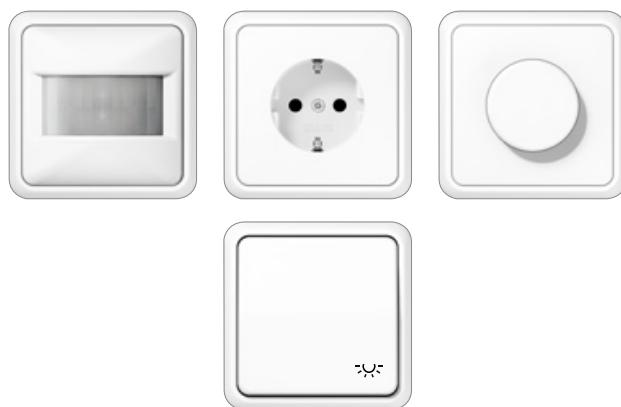

Flush-mounted range

Material

Thermoplastic

Protection level

Protection level IP 44 is ensured with sealing gasket ref.-no. 551 WU and „IP 44 frame“ of the respective design range.



 Laser labelling possible

Colours

 ivory	similar RAL 1013
 white	similar RAL 9010
 light grey	similar RAL 7035
 grey	similar RAL 7038
 brown	similar RAL 8022

Selected devices are available in the colours

green	similar RAL 6029
orange	similar RAL 2004
red	similar RAL 3003



Frame size

1-gang	81 mm x 81 mm
2-gang	152 mm x 81 mm
3-gang	223 mm x 81 mm
4-gang	294 mm x 81 mm
5-gang	365 mm x 81 mm

Frames can be installed horizontally and vertically.

Corner radius of frames 8.5

